

FP 700CE

Flejadora automática horizontal

Automatic
horizontal
strapping
machine

Machine
automatique
pour cerclage
horizontal



SABAU STRAPPING®
Fábrica de flejes y maquinaria para embalaje

CE





FP 700CE

Flejadora automática horizontal

Automatic horizontal strapping machine

Machine automatique pour cerclage horizontal

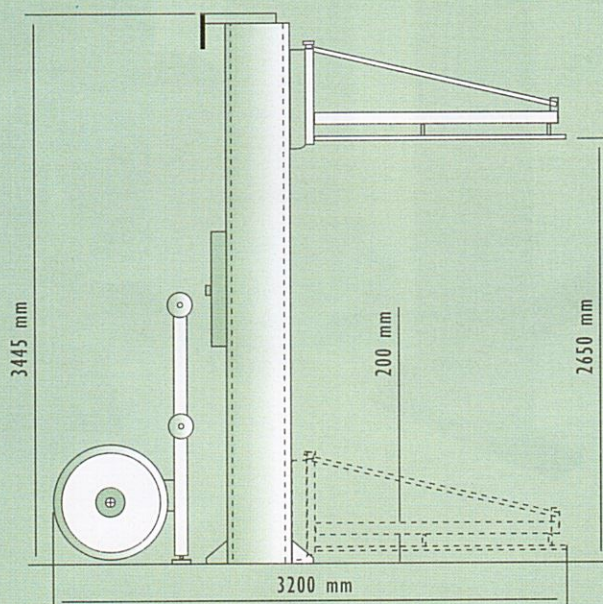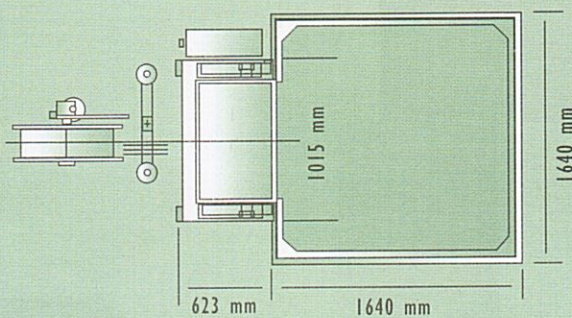

Características técnicas

Technical data

Caracteristiques techniques

Peso / Weight / Poids	1.250 kg
Potencia instalada Installed power Puissance	2,8 kW
Conexión eléctrica Electrical connection Connexion	380 III 50 Hz + Neutro TT 380 III 50 Hz + Neutral TT 380 III 50 Hz + Neutre TT
Potencia maniobra Operation power Puissance manoeuvre	0,25 kW
Tensión de maniobra Operation tension Tension de manoeuvre	24 V DC
Avance de cabezal Advance of header Avancée de la tête	250 mm por pistón neumático 250 mm pneumatic piston 250 mm piston pneumatique
Consumo aire Air consumption Consommation d'air	2,5 l/min.
Largo palet Pallet length Largeur pallet	min. 500 mm max. 1.200 mm
Altura útil Useful height Hauter utile	2.650 mm
Altura mín. de flejado Min. strapping height Hauteur min. de cerclage	200 mm
Espesor de fleje Strapping thickness Epaisseur de feuillard	0,70 -1 mm
Tipo de Fleje Type od strap Type de feuillard	Polipropileno Polipropilene Polypropylène
Tensión regulable Adjustible tension Tension réglable	hasta 300 kg up to 300 kg jusqu'à 300 kg
Producción Production Production	600 ciclos / hora 600 cycle / hour 600 cycle / heure
Panel de control Control panel Panneau de contrôle	En pupitre independiente exterior In separate desk outside Au bureau séparé en dehors
Color standard Standard colour Couleur standard	Verde Green Vert
Presión aire Air pressure Pression d'air	4-5 bar

SABAU STRAPPING®
Fábrica de flejes y maquinaria para embalaje

SABAU STRAPPING, S.L.

Basella, s/n 22560 ALCAMPELL / HU (Spain) Tel. 902 15 12 12 Fax 974 42 02 40

E-mail: sabau@sabaustrapping.com

www.sabaustrapping.com